

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : G02B 5/18, 27/44, B44F 1/12, B42D 15/10, 209/00</p>	<p>A1</p>	<p>(11) International Publication Number: WO 00/02067 (43) International Publication Date: 13 January 2000 (13.01.00)</p>
<p>(21) International Application Number: PCT/AU99/00520 (22) International Filing Date: 29 June 1999 (29.06.99) (30) Priority Data: PP 4444 2 July 1998 (02.07.98) AU (71) Applicant (for all designated States except US): COMMON-WEALTH SCIENTIFIC AND INDUSTRIAL RESEARCH ORGANISATION [AU/AU]; Limestone Avenue, Campbell, ACT 2612 (AU). (72) Inventor; and (75) Inventor/Applicant (for US only): LEE, Robert, Arthur [AU/AU]; 13 Wilkinson Street, East Burwood, VIC 3151 (AU). (74) Agent: PHILLIPS ORMONDE & FITZPATRICK; 367 Collins Street, Melbourne, VIC 3000 (AU).</p>		<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>
<p>(54) Title: DIFFRACTIVE STRUCTURE WITH INTERSTITIAL ELEMENTS</p>		
<p>(57) Abstract</p>		
<p>A diffractive device has a surface relief structure which, when illuminated by a light source, generates one or more diffraction images which are observable from particular ranges of viewing angles around the device. The device includes background diffractive structural elements and interstitial diffractive structural elements. The interstitial elements are interspersed between the background elements such that the diffractive action of the background elements is modulated by the interstitial elements, with differing interstitial element configuration in differing parts of the surface relief structure producing differing diffraction effects in corresponding parts of the diffraction images.</p> <div data-bbox="641 1144 1404 1753" data-label="Image"> </div>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

DIFFRACTIVE STRUCTURE WITH INTERSTITIAL ELEMENTS

This invention relates to diffractive devices which generate diffraction images when illuminated by a light source. It relates particularly to diffractive devices or "optically variable devices" (that is, devices which appear different when observed from different angles or under different illumination conditions) which incorporate in their surface relief structures a new type of diffractive element, hereinafter referred to as "interstitial elements".

Throughout this specification including the claims, the terms "diffraction", "diffractive" and "diffracted" have the meaning that includes the process whereby electromagnetic radiation in the form of light waves is scattered either coherently, incoherently, diffusely, reflectively and/or specularly from surface relief elements of the device in the form of ridges, grooves, troughs, indentations and/or protrusions of spatial and depth and/or height dimensions of extent greater than 0.05 microns, and the wavelength range of the incident and diffracted light is any single or multiple combination of wavelengths in the range of from 0.1 microns to 15 microns.

There are numerous different uses for diffractive devices of the type to which this invention relates. One common use is as a security element on banknotes, cheques, credit cards, share certificates, computer software and other valuable documents and objects. Diffractive devices are typically created by embossing a diffractive surface relief structure into metallised foil which is then adhered to the document or object, in such a way that the device cannot be removed without destroying it. In some cases, the diffractive structure can be embossed directly into the document or object. Optically variable structures cannot be photocopied, because a photocopy does not possess the optically variable characteristics of the original.

One common type of optically variable device is a hologram. Coherent laser radiation is split into two beams, one of which is directed at an object. Light reflected from the object is combined with the other beam to create an interference pattern, which is then embossed into a surface. When the surface is

subsequently illuminated, an image of the object is observed. Holograms have been used on Visa™ and MasterCard™ credit cards since 1984.

Holograms are best observed under a single point source of light. However, credit cards are normally used in diffuse lighting conditions, such as in
5 general daylight or under multiple fluorescent lights. As a consequence, the image observed is typically blurred and indistinct. A poor quality counterfeit hologram could therefore conceivably be passed off as an original.

Another type of optically variable device is a diffractive device composed of numerous straight-line grating elements. Straight-line gratings (and concentric
10 circular gratings) can be produced by interference between two coherent laser beams. Parallel lines are written concurrently by the interference pattern. Kinegram™ devices provide examples of optically variable devices using such technology. Relevant patent publications include European Patents 105099, 330738 and 375833. Kinegram™ devices were used on the Saudi Arabian
15 passport in 1987 and on the Austrian 5000 Schilling banknote in 1990.

An advantage of straight-line grating devices is that they provide much brighter colours than holograms, and they have considerably clearer visual effects. However, because of the diffractive properties of straight line gratings, each effect is observable only from a very narrow range of viewing angles.
20 Moreover, standard straight line gratings are useful only for producing line-art graphics and not for portraiture which requires more flexibility in terms of grey-scale and colour effect selection.

Another type of diffractive device is the Catpix™ device, used on the Australian ten dollar plastic banknote issued in 1988. The Catpix™ diffractive
25 structure consists essentially of continuous undulating lines which extend throughout the device or a substantial portion of it. The surface area is divided into notional pixels, and at each pixel the undulating lines come together to form an optical catastrophe region, which is observed by the viewer as a point of light with a fixed brightness value which depends on the spatial frequency of the lines
30 at the catastrophe region. The points of light combine to form a diffraction image

which is seen by the observer. In the case of the 1988 ten dollar note, the image was a portrait of Captain Cook.

Catpax™ diffractive devices, details of which were published in European Patent Publication EP 044 9893 B1 (the contents of which are hereby
5 incorporated herein by reference) are made using computer-controlled electron beam lithography. Each line or groove in the diffraction pattern is written individually by an electron beam. This enables precise control over the positioning and shape of each diffractive element.

Pixelgram™ diffractive devices are based on an actual division of a
10 surface relief structure into separate squares or pixels. Each pixel forms a separate diffraction grating, which may consist of straight lines or curved lines, and is responsible for generating a single point of light with a particular grey-scale and/or colour value in the diffraction image. Details of Pixelgram™ technology have been published in European Patent Publication 049 0923 B1 (the contents
15 of which are hereby incorporated herein by reference). As is the case for Catpax™ devices, Pixelgram™ devices are constructed using computer-controlled electron beam lithography.

An advantage of Pixelgram™ devices over Catpax™ devices is that the whole of each pixel area on the Pixelgram™ device contributes to the light point
20 generated by that pixel, whereas only the catastrophe region of a Catpax™ notional pixel contributes to the corresponding light point. Another advantage is that pixels may have radically different orientations from those of surrounding pixels, so that more than one diffraction image can be generated simultaneously. However, there are inevitable discontinuities between adjacent pixel gratings, and
25 these result in extraneous diffuse scattering effects. Diffuse scattering from the edges of pixels has the effect of reducing the brightness of the observed optical effects, particularly for very small pixel sizes. Moreover, because of the clear separation between pixels, it is potentially easier for a person to decode the optical effects mechanisms of Pixelgram™ structures than Catpax™ structures,
30 using microscopic examination of the structures.

Exelgram™ diffractive devices consist of diffractive elements arranged in tracks. Diffractive elements, which may be grooves, ridges, or polygonally shaped indentations or protrusions, are arranged in substantially continuous configuration along the tracks. Details of Exelgram™ technology have been published in US Patent 5,825,547 (the contents of which are hereby incorporated herein by reference). As is the case for Catpix™ and Pixelgram™ devices, Exelgram™ devices are typically created using electron beam lithography.

Exelgram™ devices, which were first used on Australian opal stamps in 1995 and American Express Travellers' cheques in 1997, overcome part of the extraneous diffuse scattering effect problem apparent in Pixelgram™ devices; however, there are still extraneous diffuse scattering effects caused at the interface between tracks.

According to the present invention, there is provided a diffractive device having a surface relief structure which, when illuminated by a light source, generates one or more diffraction images which are observable from particular ranges of viewing angles around the device, including:

- background diffractive structural elements; and
- interstitial diffractive structural elements;

wherein the interstitial elements are interspersed between the background elements such that the diffractive action of the background elements is modulated by the interstitial elements, with differing interstitial element configuration in differing parts of the surface relief structure producing differing diffraction effects in corresponding parts of the diffraction images.

In one arrangement, at least some of the background elements may consist of a multiplicity of continuously connected individual ridge or groove segments, with ridge or groove segments in adjacent background elements being arranged in an approximately parallel configuration. In this arrangement at least some of the interstitial elements consist of individual or bifurcated ridge or groove segments interspersed between the background elements, with interstitial element ridge or groove segments being approximately parallel to ridge or groove segments in adjacent background elements.

In an alternative arrangement, at least some of the background elements may be approximately parallel, each consisting of a plurality of discontinuous individual ridge or groove segments. In this arrangement, at least some of the interstitial elements are approximately parallel to each other, each consisting of one or more ridge or groove segments and each being located in a discontinuity in a background element. Some of the interstitial elements may be oriented generally at right-angles to the general orientation of the background elements, in order to provide one or more images which are observable from positions at right-angles to the positions from which images produced by the background elements can be observed..

The interstitial elements may be separate structural elements, or they may be joined to other structural elements. It is preferred that at least some of the interstitial elements are connected smoothly to adjacent interstitial elements and/or background elements in one or more of the following ways:

- (a) a single interstitial element bifurcates smoothly into two interstitial elements;
- (b) two interstitial elements join smoothly into a single interstitial element;
- (c) an interstitial element joins smoothly into a background element;
- (d) an interstitial element of a particular depth and width transitions smoothly into an interstitial element of a different depth and width;
- (e) an interstitial element of a particular shape and/or curvature transitions smoothly into an interstitial element of a different shape and/or curvature;
- (f) an interstitial element with a particular angular orientation relative to the background elements joins smoothly to an interstitial element having a different angular orientation.

Similarly, some of the background elements may be connected smoothly to adjacent background elements and/or interstitial elements in one or more of the following ways:

- (a) a single background element bifurcates smoothly into two background elements;
- (b) two background elements join smoothly into a single background element;
- 5 (c) a background element joins smoothly into an interstitial element;
- (d) a background element of a particular depth and width transitions smoothly into a background element of a different depth and width;
- (e) a background element of a particular shape and/or curvature transitions smoothly into a background element of a different shape and/or curvature;
- 10 (f) a background element with a particular angular orientation relative to other background elements joins smoothly to a background element having a different angular orientation.

The background diffractive structural elements and the interstitial
15 diffractive structural elements may have any suitable shapes and configurations. It is preferred that each of the background elements and the interstitial elements has a shape which is one or more of:

- (a) a straight, curved or undulating groove;
- (b) a straight, curved or undulating ridge;
- 20 (c) an array of dot-shaped indentations or protrusions; or
- (d) a polygonally shaped indentation or protrusion.

As indicated above, the interstitial element configuration is responsible for the particular optical effects produced by the surface relief structure. It is preferred that the diffraction effects observed in a particular part of the image are
25 determined by the interstitial element configuration in a corresponding part of the surface relief structure, and the interstitial element configuration features include:

- (a) lengths of interstitial elements;
- (b) widths of interstitial elements;
- (c) depths and/or heights of interstitial elements;
- 30 (d) local spatial frequency of interstitial elements;
- (e) degree of curvature of interstitial elements;

- (f) shape of interstitial elements; and
- (g) shapes of joins between adjacent interstitial elements.

In order to produce particular optical effects, the interstitial elements in a particular region may all have the same shape, orientation and spatial frequency.

- 5 However, in order to achieve other types of effects, the interstitial elements may vary continuously in terms of orientation, curvature, thickness and/or shape, the variations being a means by which image information is encoded into the surface relief structure.

In a typical arrangement of the present invention, the background
10 elements generate a "carrier wave" and the interstitial elements modulate the carrier wave according to the information which is encoded into them.

The interstitial elements may be oriented in any suitable manner relative to the background elements. It is preferred that at least some of the interstitial elements are oriented generally parallel to the background elements. It is also
15 possible that at least some of the interstitial elements are arranged in a comb-like configuration, with the teeth of the comb being oriented at right angles or at an angle oblique to the general orientation of the background elements. Alternatively or additionally to the comb-type configurations, at least some of the interstitial elements may be arranged in groups oriented at right angles or obliquely to the
20 general orientation of the background elements, such that a cross-section through the group has a periodic or sinusoidal shape of many repeating periods or oscillations. In general, a group of parallel diffractive elements produces a diffraction effect which is observable from a direction perpendicular to the orientation of the diffractive elements. Thus a surface relief structure which
25 includes both interstitial elements arranged parallel to the background elements and interstitial elements arranged at right angles to the background elements will produce at least two different images, observable from directions which are at rights angles to each other. Interstitial elements arranged in other oblique orientations will produce diffraction effects observable from correspondingly
30 different directions.

It is preferred that at least some of the interstitial element configurations are designed to create grey-scale or variable image intensity information in the image, and one or more of the following configuration features give rise to the grey-scale or variable image intensity information:

- 5 (a) lengths of interstitial elements;
- (b) degree of curvature of interstitial elements;
- (c) widths of interstitial elements and shapes of joins between adjacent elements;
- (d) local slope or angle of interstitial elements.

10 It is further preferred that at least some interstitial element configurations are designed to create colour information in the image. Colour information is typically dependent on the spatial frequencies of the interstitial elements (the number of substantially parallel diffractive elements per unit of distance).

The background elements may be of any suitable shape and
15 configuration. It is preferred that the background elements are in one or more of the following configurations:

- (a) straight, equally spaced background elements;
- (b) straight, variably spaced background elements;
- (c) undulating, equally spaced background elements;
- 20 (d) undulating, variably spaced background elements;
- (e) equally spaced closed or open elliptically shaped background elements;
- (f) variably spaced closed or open elliptically shaped background elements;
- 25 (g) zig-zag shaped background elements of variable zig or zag angle.

In some embodiments of the invention, the surface relief structure may generate two or more diffraction images which are observable from different ranges of viewing angles. In such embodiments, some regions of the surface
30 relief structure contribute to one of the images, and other regions contribute to another of the images.

The limit of resolution of a human eye when viewing an object at close quarters is typically about 0.25mm. It is desirable that at least some component parts of images generated by the surface relief structure be smaller than this so that the images appear smooth. There are also security advantages to having components such as microwriting and micrographics which are too small to be observed except with a magnifying glass or microscope. It is therefore preferred that at least some of the interstitial elements have lengths of less than 0.25mm. It is especially preferred that some elements have dimensions in the range of 4 to 30 micron. On the other hand, it is preferred that at least some of the background elements have elements extend throughout the length or width of the surface relief structure.

In addition to the features discussed above, there are numerous items which can be incorporated into the surface relief structure. In some arrangements, the surface relief structure may include between background elements one or more of the following:

- (a) small scale text or graphics indented into or protruding from the surface relief structure;
- (b) interstitial elements consisting of parallelograms of varying angular orientations indented into the surface relief structure;
- (c) diffusely reflecting randomly distributed interstitial elements;
- (d) diffusely reflecting trapezoidal interstitial elements.

It will be appreciated that the present invention has several advantages over the prior art Hologram, KinegramTM, CatpaxTM, PixelgramTM and ExelgramTM structures. These include:

- (a) The background diffractive structural elements provide a "carrier wave" which has continuous connectivity throughout the structure, thereby minimising the diffuse scattering edge effects when compared to similar effects that arise from the edges of the pixels in PixelgramTM and KinegramTM structures and along the edges of tracks in ExelgramTM structures. Diffuse scattering effects from the

edges of pixellated devices of very small pixel size have the effect of reducing the brightness of the observed optical effects.

(b) The interstitial structural elements are located within the area of the background "carrier wave" structural elements, so the optical characteristics of each region are the result of a complex interaction between the diffractive properties of both the interstitial elements and the background structural elements. This embedding of interstitial elements within a continuous background structural element pattern makes it much more difficult to de-code the optical effects mechanisms from a microscopic examination of the surface relief structure. The surface relief structure is therefore more secure with respect to attempted re-origination by reverse engineering of the optical microstructure.

(c) Since the background structural element pattern is continuous in both directions, the image resolution of any image encoded into the microstructure is determined by the relative sizes of the interstitial element regions. The size of each interstitial region is determined by the number of interstitial elements and the lengths of these elements, and these are continuously variable. Thus the microstructure has the unique property that the encoded image resolution is continuously variable throughout the surface relief structure.

(d) Interstitial "doping" of a continuous background structural element pattern by a multiplicity of structural element "filaments" of variable length, width, curvature and depth allows for the incorporation of a much greater range of specialised optical security effects at a much smaller scale when compared to diffractive microstructures based on a pixellated format. The fundamental optical information unit in the present invention is a structural element, whereas in pixellated devices the fundamental optical information unit is a pixel consisting of a relatively large number of structural elements. Hence interstitial

element structures offer the possibility of designing "optically variable device" images with much higher resolution optical effects.

- (e) Because interstitial element microstructures require individual fabrication of each groove element, the fabrication of the microstructure requires advanced electron beam lithography or some other advanced method. Holographic origination is not possible, so the availability of the technology is much more restricted, and security printing industry requirements for controlled access to the technology are much more achievable.

Although the invention has been described above primarily with reference to application in providing visually observable images, the invention also has application to machine-readable data and security applications. Machine-readable digital information may be encoded into the positioning, length, orientation and/or other physical characteristics of interstitial elements, such that the information may be read by passing a laser over the interstitial elements and analysing and decoding the reflected light.

The invention will hereinafter be described in greater detail with reference to the attached drawings which show example forms of the invention. It is to be understood that the particularity of those drawings does not supersede the generality of the preceding description of the invention.

Figure 1 is a representation of a region of a surface relief structure according to an embodiment of the invention.

Figure 2 is a schematic illustration of a region of surface relief structure according to an embodiment of the invention, showing various features, with the bottoms of grooves highlighted.

Figure 3 shows the region of Figure 2, but with the tops of ridges highlighted.

Figure 4 is a representation of a region of surface relief structure according to the invention showing differing groove bifurcation patterns.

Figure 5a is a representation of a region of surface relief structure according to the invention showing a more complex groove bifurcation pattern (tops of ridges shown in black).

Figure 5b shows the region of Figure 5a with the bottoms of grooves
5 shown in black.

Figure 6a shows a magnified view of a part of Figure 5b, and Figure 6b shows a magnified view of a part of Figure 5a.

Figure 7a shows a magnified view of a groove bifurcation area, and Figures 7b to 7e show the nature of the bifurcation in more detail.

10 Figure 8 illustrates a comb-like collection of interstitial elements.

Figures 9a and 9b provide further illustrations of groove bifurcation.

Figure 10 is a representation of a region of a surface relief structure according to a further embodiment of the invention.

Figures 11a to 11d provide illustrations of interstitial elements being added
15 in to background elements according to one arrangement of the invention.

Figures 12a to 12d illustrate "right angle" interstitial elements being added in to background elements according to one arrangement of the invention.

Figure 13 is a representation of a region of a surface relief structure incorporating numerous interstitial elements according to an embodiment of the
20 invention.

Figure 14 is a representation of another region of a surface relief structure incorporating numerous interstitial elements according to an embodiment of the invention.

Figure 15 is a greatly enlarged image of a surface relief structure formed
25 according to an embodiment of the invention.

For the sake of convenience, all of the examples in Figures 1 to 14 have been illustrated as black-and-white line drawings. In reality, the examples are three-dimensional surface relief structures, typically with a single colour throughout. Accordingly, the sharp distinction between black and white shown in
30 the drawings is not present in the surface relief structures and is merely intended to contrast schematically the tops of ridges with the bottoms of grooves. This

mode of representation is less than perfect because it does not allow for differing depths of grooves. Furthermore, for the sake of clarity the background and interstitial elements shown in the drawings have been limited to grooves and ridges; whereas they may equally well consist of other diffractive shapes including dot-shaped indentations and protrusions and polygonally shaped indentations and protrusions.

Referring firstly to Figure 1, there is shown a portion of surface relief structure from a diffractive device which, when illuminated by a light source, generates a diffraction image which is observable from particular ranges of viewing angles around the device, including:

- background diffractive structural elements 1; and
- interstitial diffractive structural elements 2;

wherein the interstitial elements 2 are interspersed between the background elements 1 such that the diffractive action of the background elements 1 is modulated by the interstitial elements 2, with differing interstitial element configuration 3, 4 in differing parts of the surface relief structure producing differing diffraction effects in corresponding parts of the diffraction image.

It should be observed from Figure 1 that, in this preferred embodiment, background elements 1 are not completely parallel with each other throughout the surface relief structure. They are generally parallel, in the sense that they are all generally horizontal as represented on the page, but the background elements located towards the top and bottom of the region represented clearly undulate, whereas the background grooves near the centre are relatively straight. It will further be observed that the interstitial elements show similar variations in degree of undulation. Continuous variation in terms of orientation, curvature, thickness and/or shape between interstitial and/or background elements can be a means by which image information is encoded into the surface relief structure.

In the surface relief structure of Figure 1, and in most other embodiments of the invention, it is difficult to distinguish interstitial elements from background elements. This is partly because it is a preferred feature that interstitial elements

be joined smoothly to adjacent interstitial elements or background elements. However, to assist in illustration of the underlying principles of the invention, Figure 2 shows various substantially disconnected patterns of interstitial elements, with the bottoms of grooves shown in black. Figure 3 shows the pattern
5 of Figure 2 with the tops of ridges shown in black.

Background grooves 1 and ridges 5 extend the whole way across the structure. Interstitial grooves 2 and ridges 6 are located between background grooves 1 and ridges 5, and they extend for shorter distances across the structure. There are five distinct regions shown on Figures 2 and 3, marked 7, 8,
10 9, 10 and 11. In region 7, there is a single interstitial groove 1 between each pair of background grooves 2. The interstitial grooves are substantially parallel to the background grooves. In regions 8 and 9, there are two interstitial grooves between each pair of background grooves, so that these regions have a higher spatial frequency than region 7. Once again, the interstitial grooves are oriented
15 substantially parallel to the background grooves. Near the edges of each of regions 7, 8 and 9 the interstitial groove depths and widths gradually reduce to zero. This minimises diffuse scattering effects and ensures smooth connectivity between adjacent regions.

In regions 10 and 11 the interstitial grooves are oriented at right angles to
20 the background grooves. A cross-section through the group of interstitial grooves has a periodic or sinusoidal shape of many repeating periods or oscillations. These "right-angle" interstitial elements give rise to "right angle effects", which are diffraction effects observable from viewing directions which are perpendicular to the direction from which the other effects are observable. If it is desired that
25 effects be observable from an oblique angle, this can be accomplished by varying the angular orientation of the interstitial grooves in regions 10 and 11 relative to the background grooves.

Figure 4 illustrates connectivity between adjacent regions of different spatial frequency. This example shows two possible mechanisms for achieving
30 smooth connectivity. The first is interstitial groove bifurcation, which can be seen in the interstitial grooves marked 12, 13 and 14. A single interstitial element

bifurcates smoothly into two interstitial elements, and the two interstitial elements join smoothly into a single element. The second is interstitial groove depth modulation, shown in interstitial grooves 15, where the interstitial grooves smoothly reduce their height or depth and width to zero within the lower spatial
5 frequency region.

Figures 5a and 5b show a computer calculated region of surface relief structure. The black regions in Figure 5a correspond to the tops of ridges and the black regions in Figure 5b correspond to the bottoms of grooves. The two figures together show how the interstitial elements in 5a appear to transform into
10 corresponding bifurcated interstitial elements in 5b.

Figures 6a and 6b are magnified version of a small part of Figures 5b and 5a respectively, showing the smooth connectivity of the interstitial groove end points to the background interstitial groove regions.

Figures 7a to 7e and 9a and 9b illustrate this point further. Figure 7a
15 shows a group of interstitial elements 16 which are grooves located between background groove elements 17. Interstitial elements 16 are on the right hand side of the region of surface relief structure shown, and they taper off towards the mid-point 18. Figure 7b shows a detail of the end of one interstitial groove 16 located between two background grooves 17. Ridge 19 branches into two
20 separate ridges 20 and 21, with groove 16 located between them. Figures 7c, 7d and 7e show three cross-sections marked on Figure 7b as A, B and C respectively. Cross-section A is taken at a point on ridge 19 before ridge 19 starts branching into two separate ridges. Accordingly, Figure 7c shows only ridge 19 and the sidewalls of grooves 17.

25 Cross-section B is taken at a point where ridge 19 is just starting to branch into two separate ridges. Accordingly, Figure 7d shows ridges 21 and 20, with a small groove 16 located between them, surrounded by background grooves 17. Cross-section C is taken at a point where branching of ridge 19 into separate ridges 21 and 20 is complete. Accordingly, Figure 7e shows a full depth groove
30 16, fully separating groove branches 21 and 20. These drawings demonstrate the preferred manner in which grooves taper off, both in terms of depth and width,

rather than ending abruptly, which as indicated previously can cause extraneous scattering effects.

Figures 9a and 9b provide similar illustrations. Ridges are represented in black, with grooves in white. Figure 9a shows background ridges 22. Between
5 background ridges 22 there are interstitial ridges 23, 24 and 25. Each of single ridges 23 branches into a pair of ridges 24, 25. Figure 9b shows five cross-sections taken progressively as ridge 23 branches into ridges 24 and 25.

Although Figures 7a to 7e and 9a and 9b do not show other variations, it will be appreciated that similar smooth transitions are preferably applied when an
10 interstitial element of a particular depth and width transitions into an interstitial element of a different depth and width, and where interstitial elements of particular shapes and/or curvatures and/or angular orientations transition into other interstitial elements with different shapes and/or curvatures and/or orientations.

15 Figure 8 shows a collection of interstitial elements 27 joined at right angles to a background or interstitial element 26 in a comb-type configuration. This type of configuration provides an alternative to the configurations of regions 10 and 11 in Figures 2 and 3, for producing right-angle effects. The brightness of a right-angle effect will depend upon the amount of light diffracted by right-angle
20 interstitial elements 27, and the right-angle effect can therefore be modulated by modulating the lengths of elements 27 as illustrated. If an oblique-angle effect is desired in place of a right-angle effect, this can be arranged by varying the angle of comb-teeth elements 27 relative to comb-backbone element 26.

Figure 10 shows a region of surface relief structure from another
25 embodiment of the invention. The region is approximately 50 micron in width. As is the case for the structure of Figure 1, the background elements vary in degree of undulation. Some disconnected interstitial elements are shown.

Figures 11a to 11d illustrate another way of adding interstitial elements to background elements. Figure 11a shows the background elements extending
30 horizontally across the page, parallel to each other. Each line 28 constitutes a multiplicity of continuously connected individual ridge or groove segments. Figure

11b shows that, in order to insert an interstitial element into a background element, the background element is made discontinuous at points 29 and 30, and an interstitial element 31 is inserted into the gap. A similar operation is performed on a number of adjacent background elements, resulting in a number of adjacent
5 interstitial elements having approximately parallel ridge or groove segments.

Figure 11c shows the operation extended so that the background elements 28 have three interstitial "strip insertions" 32, 33 and 34. A further variation is shown in Figure 11d, in which there are almost as many interstitial segments 35 as there are background segments 28. Importantly, in the
10 configuration shown in Figure 11d, interstitial elements often connect a discontinuity on a background element to a discontinuity on a different background element, rather than to another discontinuity on the same background element. As shown in Figure 11d, this can result in continuous ridges or grooves 36 which are oriented at an angle to the background elements,
15 producing a different diffractive effect. It is desirable for grooves or ridges to be substantially continuous, as this avoids extraneous diffraction effects created by abrupt edges.

Figures 12a to 12d illustrate interstitial elements which are oriented generally at right angles to the general orientation of the background elements.
20 Figure 12a shows a plurality of generally parallel background elements 37 extending horizontally across the page. Figure 12b shows that discontinuities have been introduced into background elements 37 at points 38 and 39. Interstitial elements 40, oriented at right angles to background elements 37 have been added into the gap, each interstitial element connecting two of
25 discontinuities 38 or 39.

Figure 12c shows three regions of "right angle" interstitial elements 41, 42 and 43. Figure 12d shows a region of "right angle" interstitial elements 44 and a region 45 of a "strip element insertion".

Figures 13 and 14 extend the concepts shown in Figures 11 and 12 by
30 showing regions which include multiple varieties of background and interstitial elements. For the sake of convenience, background elements are illustrated in

each of Figures 11 to 14 as being generally horizontal straight lines, but it is to be understood that they may have other more complex curved or wavy configurations.

Figures 13 and 14 show some regions 47 in which the surface relief structure is composed entirely of background element segments, some regions 48 in which the surface relief structure is composed of background element segments interspersed with interstitial element segments, and some regions 46 in which the surface relief structure is composed entirely of interstitial elements. For the sake of convenience in designing the structure, the structure has notional square regions surrounded by background element regions 49 and 50.

Figure 15 is a much magnified image of an actual surface relief structure according to the invention.

It will be appreciated that there are unlimited numbers of different ways in which interstitial elements can be applied in accordance with the invention. In many applications it is desirable to restrict the number of different ways in which elements are applied, so that predefined desired effects can be produced in a systematic manner. It is therefore useful to define a palette of a limited number of different interstitial element configurations. Such a palette would desirably include configurations designed to provide a variety of different grey-scale or variable image intensity effects and configurations designed to provide a variety of different colour effects. Different image intensity effects can be produced by differing lengths of interstitial elements, differing degree of curvature of interstitial elements, and/or differing widths of interstitial elements and shapes of joins between adjacent elements. Different colour effects can be produced by differing spatial frequencies of interstitial elements.

It is to be understood that various alterations, additions and modifications may be made to the parts previously described without departing from the ambit of the invention.

CLAIMS

1. A diffractive device having a surface relief structure which, when illuminated by a light source, generates one or more diffraction images which are
5 observable from particular ranges of viewing angles around the device, including:
background diffractive structural elements; and
interstitial diffractive structural elements;
wherein the interstitial elements are interspersed between the background elements such that the diffractive action of the background elements is
10 modulated by the interstitial elements, with differing interstitial element configuration in differing parts of the surface relief structure producing differing diffraction effects in corresponding parts of the diffraction images.
2. A diffractive device according to claim 1 wherein at least some of the background elements consist of a multiplicity of continuously connected individual
15 ridge or groove segments, with ridge or groove segments in adjacent background elements being arranged in an approximately parallel configuration, and wherein at least some of the interstitial elements consist of individual or bifurcated ridge or groove segments interspersed between the background elements, with interstitial element ridge or groove segments being approximately parallel to ridge or groove
20 segments in adjacent background elements.
3. A diffractive device according to claim 1 wherein at least some of the background elements are approximately parallel, each consisting of a plurality of discontinuous individual ridge or groove segments, and wherein at least some of the interstitial elements are approximately parallel to each other, each consisting
25 of one or more ridge or groove segments and each being located in a discontinuity in a background element.
4. A diffractive device according to claim 3 wherein at least some of the interstitial elements are connected smoothly at each end to a background element.

5. A diffractive device according to claim 3 or claim 4 wherein at least some of the interstitial elements are oriented generally at right-angles to the general orientation of the background elements.

6. A diffractive device according to any one of claims 1 to 5 wherein at least
5 some of the interstitial elements are connected smoothly to adjacent interstitial elements and/or background elements in one or more of the following ways:

- (a) a single interstitial element bifurcates smoothly into two interstitial elements;
- 10 (b) two interstitial elements join smoothly into a single interstitial element;
- (c) an interstitial element joins smoothly into a background element;
- (d) an interstitial element of a particular depth and width transitions smoothly into an interstitial element of a different depth and width;
- 15 (e) an interstitial element of a particular shape and/or curvature transitions smoothly into an interstitial element of a different shape and/or curvature;
- (f) an interstitial element with a particular angular orientation relative to the background elements joins smoothly to an interstitial element having a different angular orientation.

20 7. A diffractive device according to any one of claims 1 to 6 wherein at least some of the background elements are connected smoothly to adjacent background elements and/or interstitial elements in one or more of the following ways:

- 25 (a) a single background element bifurcates smoothly into two background elements;
- (b) two background elements join smoothly into a single background element;
- (c) a background element joins smoothly into an interstitial element;
- 30 (d) a background element of a particular depth and width transitions smoothly into a background element of a different depth and width;

- (e) a background element of a particular shape and/or curvature transitions smoothly into a background element of a different shape and/or curvature;
- (f) a background element with a particular angular orientation relative to other background elements joins smoothly to a background element having a different angular orientation.

8. A diffractive device according to any one of claims 1 to 7 wherein each of the background elements and the interstitial elements has a shape which includes one or more of the following features:

- (a) a straight, curved or undulating groove;
- (b) a straight, curved or undulating ridge;
- (c) an array of dot-shaped indentations or protrusions; or
- (d) a polygonally shaped indentation or protrusion.

9. A diffractive device according to any one of claims 1 to 8 wherein the diffraction effects observed in a particular part of the image are determined by the interstitial element configuration in a corresponding part of the surface relief structure, and the interstitial element configuration features include one or more of the following features:

- (a) lengths of interstitial elements;
- (b) widths of interstitial elements;
- (c) depths and/or heights of interstitial elements;
- (d) local spatial frequency of interstitial elements;
- (e) degree of curvature of interstitial elements;
- (f) shape of interstitial elements; and
- (g) shapes of joins between adjacent interstitial elements.

10. A diffractive device according to claim 9 which includes between background elements interstitial elements which vary continuously in terms of orientation, curvature, thickness and/or shape, the variations being a means by which image information is encoded into the surface relief structure.

11. A diffractive device according to claim 9 or claim 10 wherein at least some of the interstitial elements are oriented generally parallel to the background elements.
12. A diffractive device according to any one of claims 9 to 11 wherein at least
5 some of the interstitial elements are arranged in a comb-like configuration, with the teeth of the comb being oriented at right angles or at an angle oblique to the general orientation of the background elements.
13. A diffractive device according to any one of claims 9 to 12 wherein at least
10 some of the interstitial elements are arranged in groups oriented at right angles or obliquely to the general orientation of the background elements, such that a cross-section through the group has a periodic or sinusoidal shape of many repeating periods or oscillations.
14. A diffractive device according to any one of claims 9 to 13 wherein at least
15 some interstitial element configurations are designed to create grey-scale or variable image intensity information in the image, and one or more of the following configuration features give rise to the grey-scale or variable image intensity information:
- (a) lengths of interstitial elements;
 - (b) degree of curvature of interstitial elements;
 - 20 (c) widths of interstitial elements and shapes of joins between adjacent elements;
 - (d) local slope or angle of interstitial elements.
15. A diffractive device according to any one of claims 9 to 14 wherein at least
25 some interstitial element configurations are designed to create colour information in the image.
16. A diffractive device according to any one of claims 1 to 15 wherein the background elements include one or more of the following configurations:
- (a) straight, equally spaced background elements;
 - (b) straight, variably spaced background elements;
 - 30 (c) undulating, equally spaced background elements;
 - (d) undulating, variably spaced background elements;

- (e) equally spaced closed or open elliptically shaped background elements;
 - (f) variably spaced closed or open elliptically shaped background elements;
 - 5 (g) zig-zag shaped background elements of variable zig or zag angle.
17. A diffractive device according to any one of claims 1 to 16 wherein the surface relief structure generates two or more diffraction images which are observable from different ranges of viewing angles, wherein some regions of the surface relief structure contribute to one of the images, and other regions
- 10 contribute to another of the images.
18. A diffractive device according to any one of claims 1 to 17 wherein at least some of the interstitial elements have lengths of less than 0.25mm.
19. A diffractive device according to claim 18 wherein the background elements have lengths of greater than 0.25mm.
- 15 20. A diffractive device according to any one of claims 1 to 19 wherein the surface relief structure includes between background elements one or more of the following:
- (a) small scale text or graphics indented into or protruding from the surface relief structure;
 - 20 (b) interstitial elements consisting of parallelograms of varying angular orientations indented into the surface relief structure;
 - (c) diffusely reflecting randomly distributed interstitial elements;
 - (d) diffusely reflecting trapezoidal interstitial elements.
21. A diffractive device according to any one of claims 1 to 20 wherein
- 25 machine-readable digital information is encoded into the positioning, length, orientation and/or other physical characteristics of interstitial elements, such that the information may be read by passing a laser over the interstitial elements and analysing and decoding the reflected light.

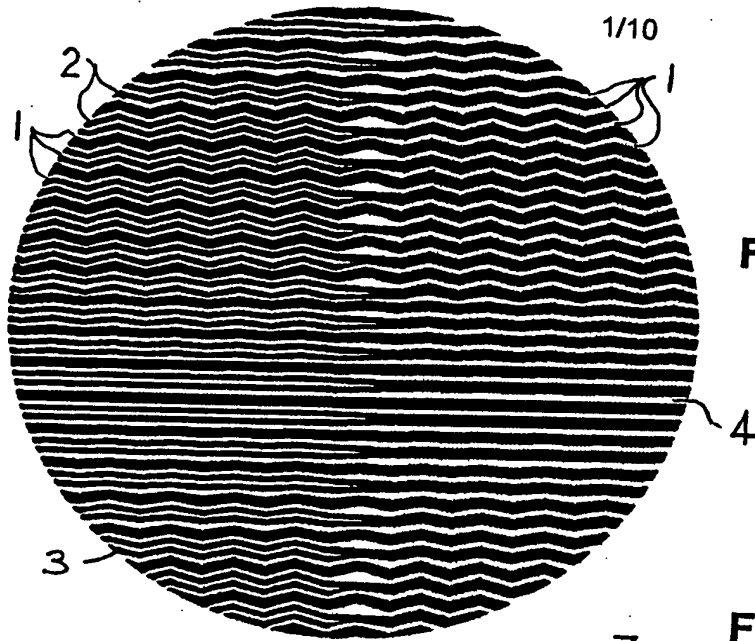


FIG 1

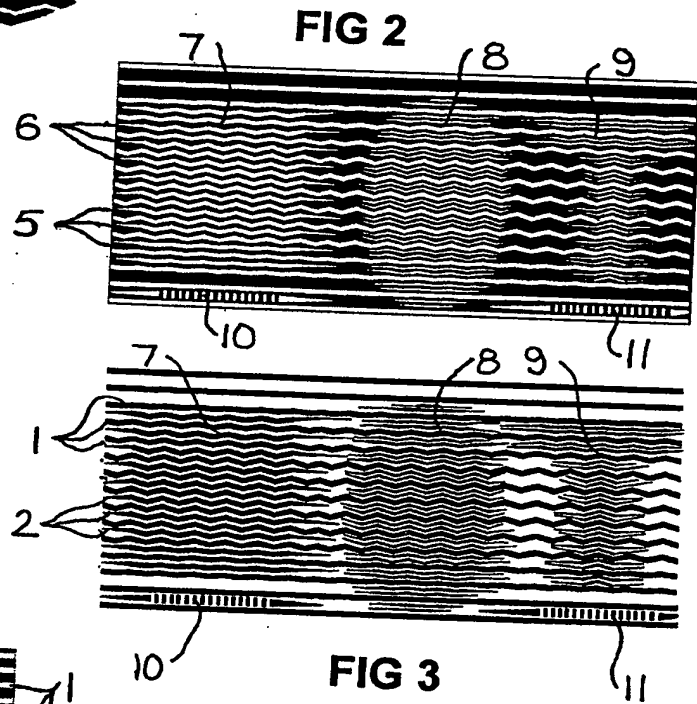


FIG 2

FIG 3

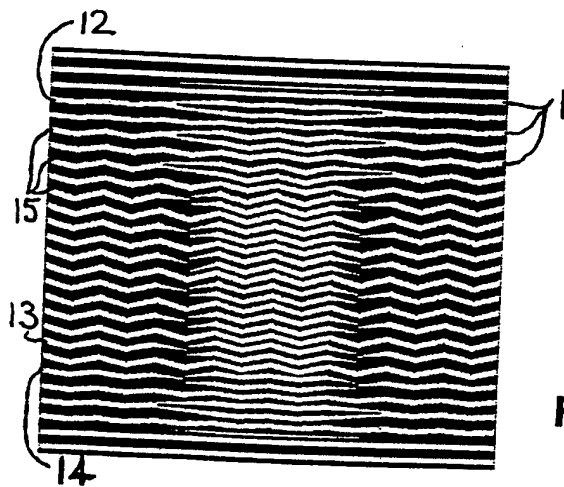


FIG 4

2/10

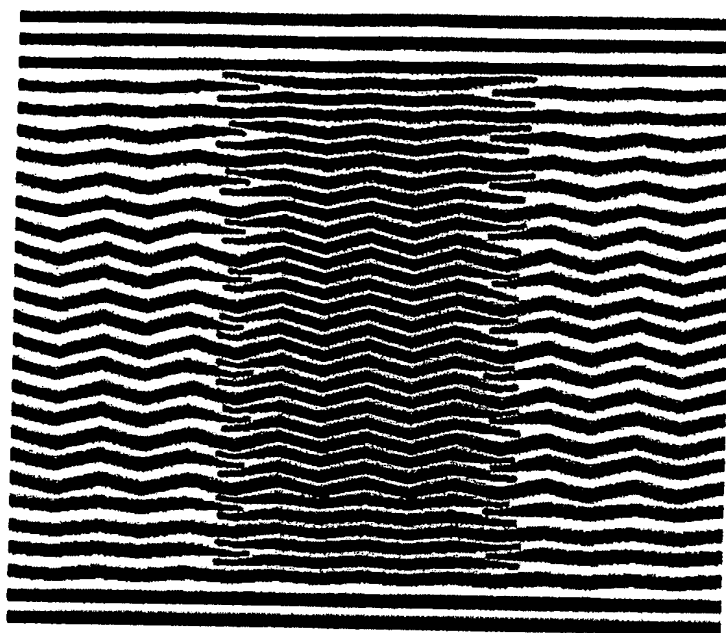


FIG 5a

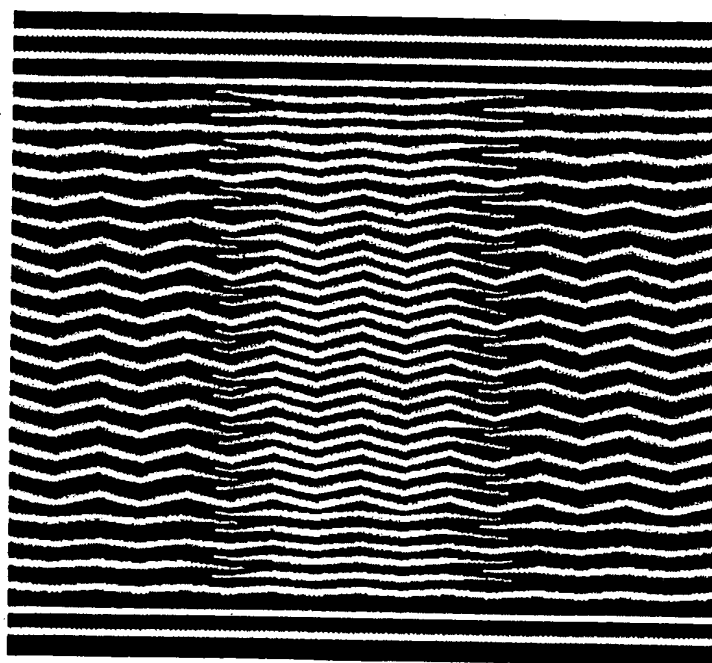


FIG 5b

3/10



FIG 6a

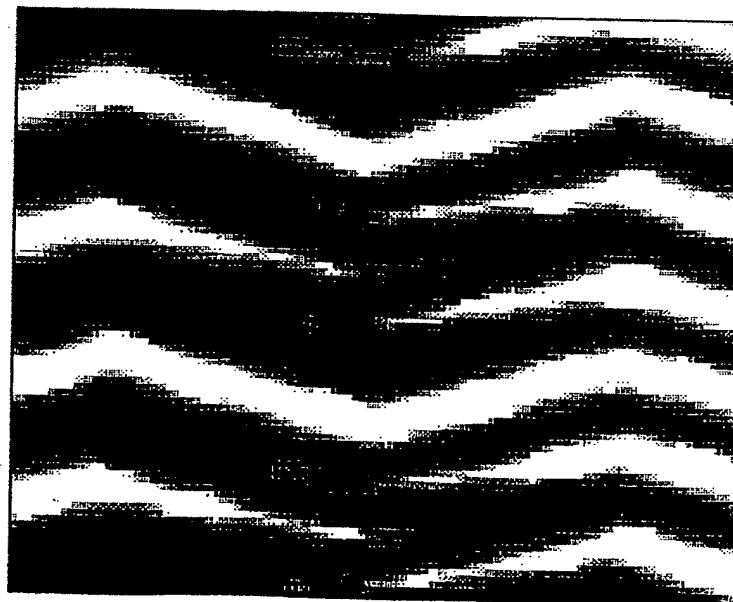
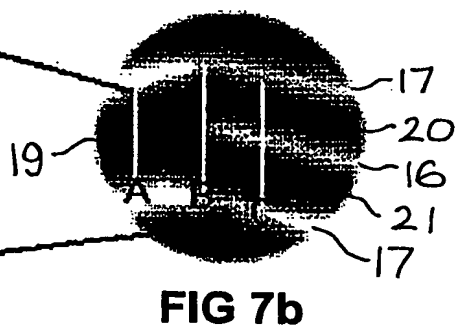
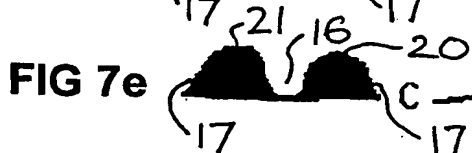

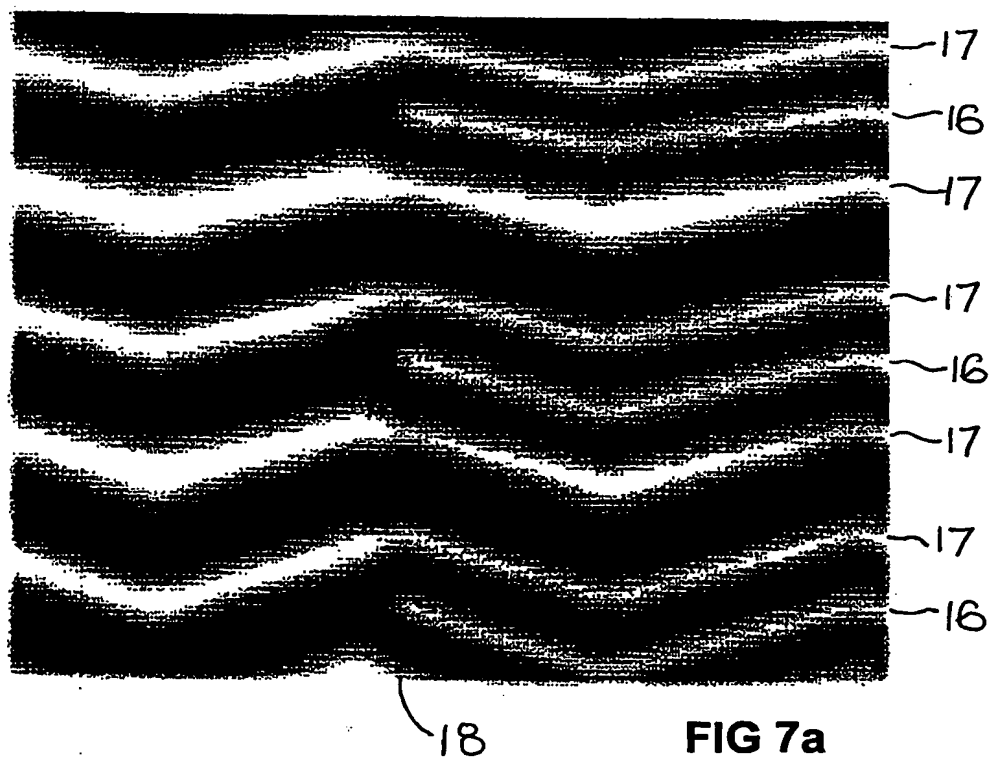


FIG 6b

4/10





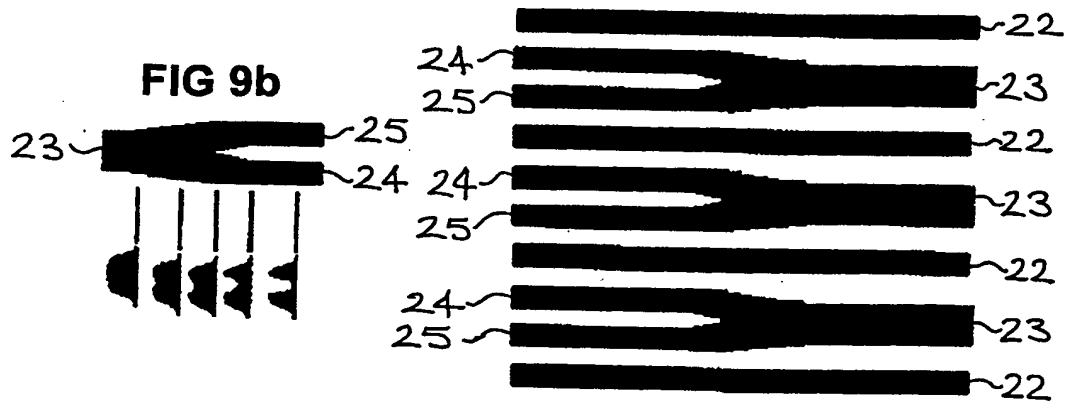


FIG 9a

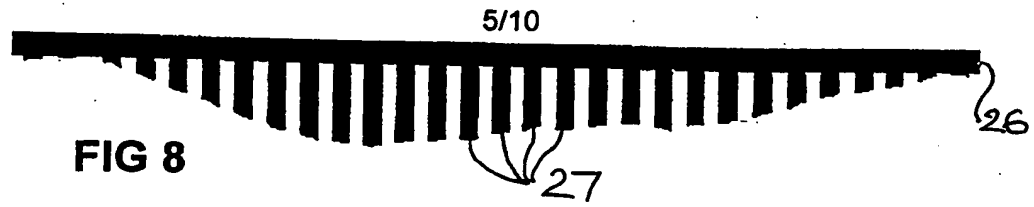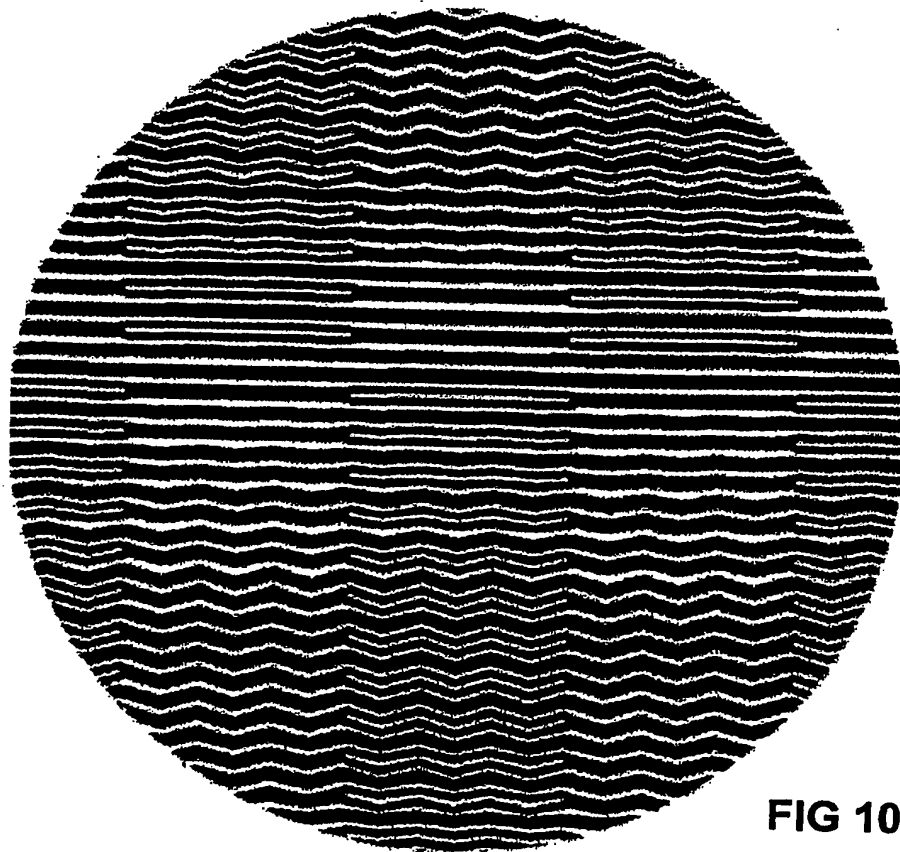

6/10

FIG 11a

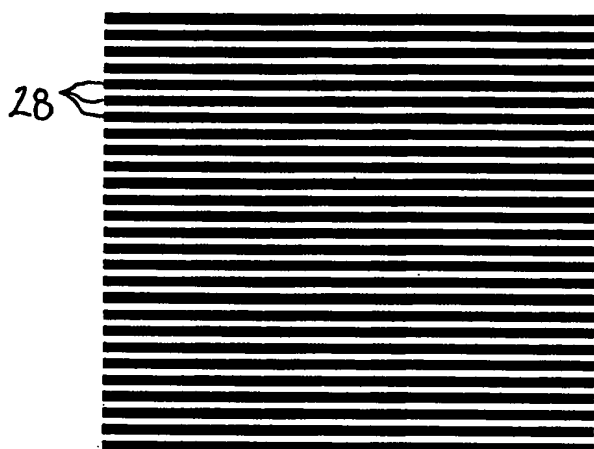


FIG 11b

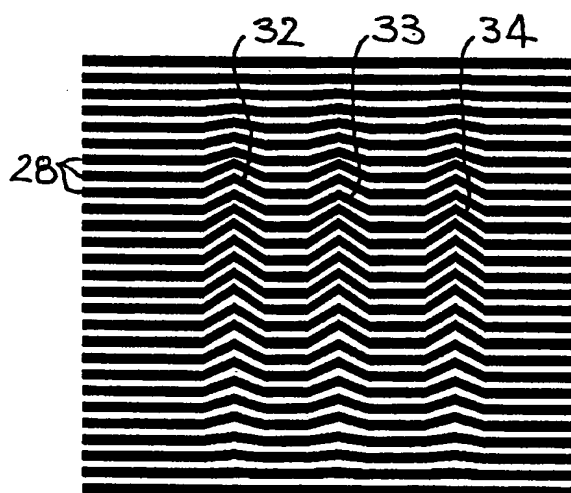
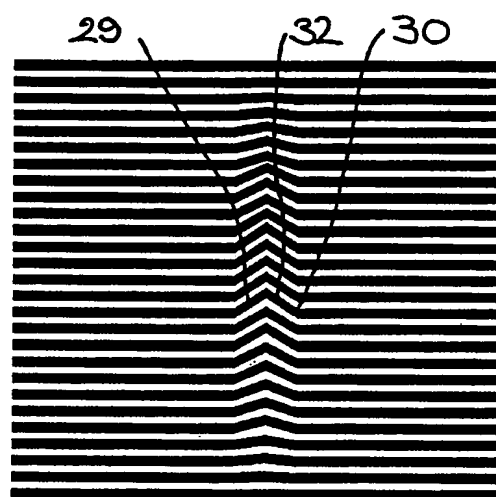


FIG 11c

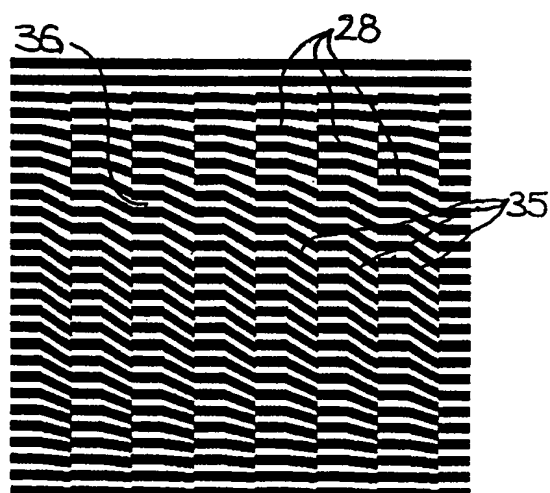


FIG 11d

7/10

FIG 12a

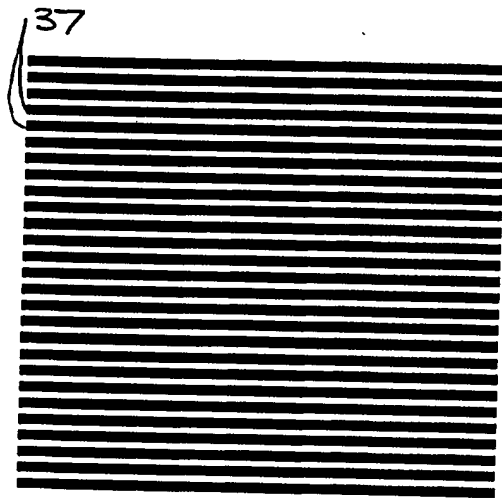


FIG 12b

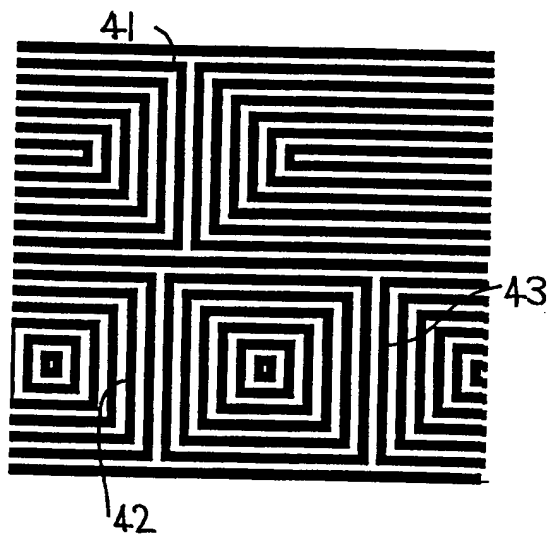
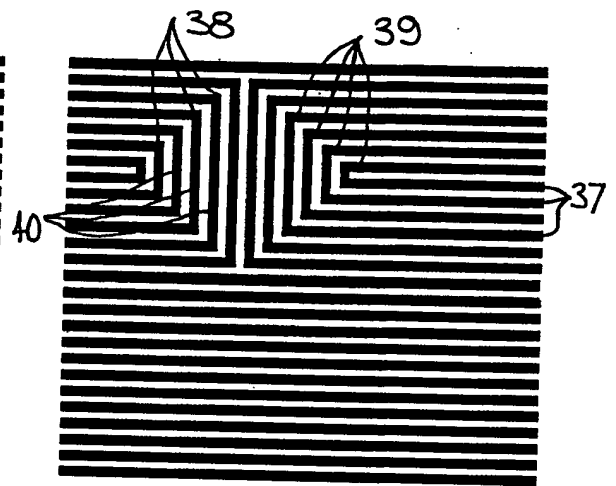


FIG 12c

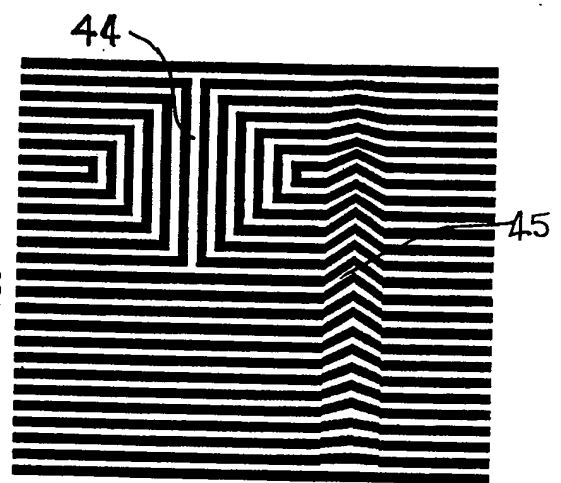


FIG 12d

8/10

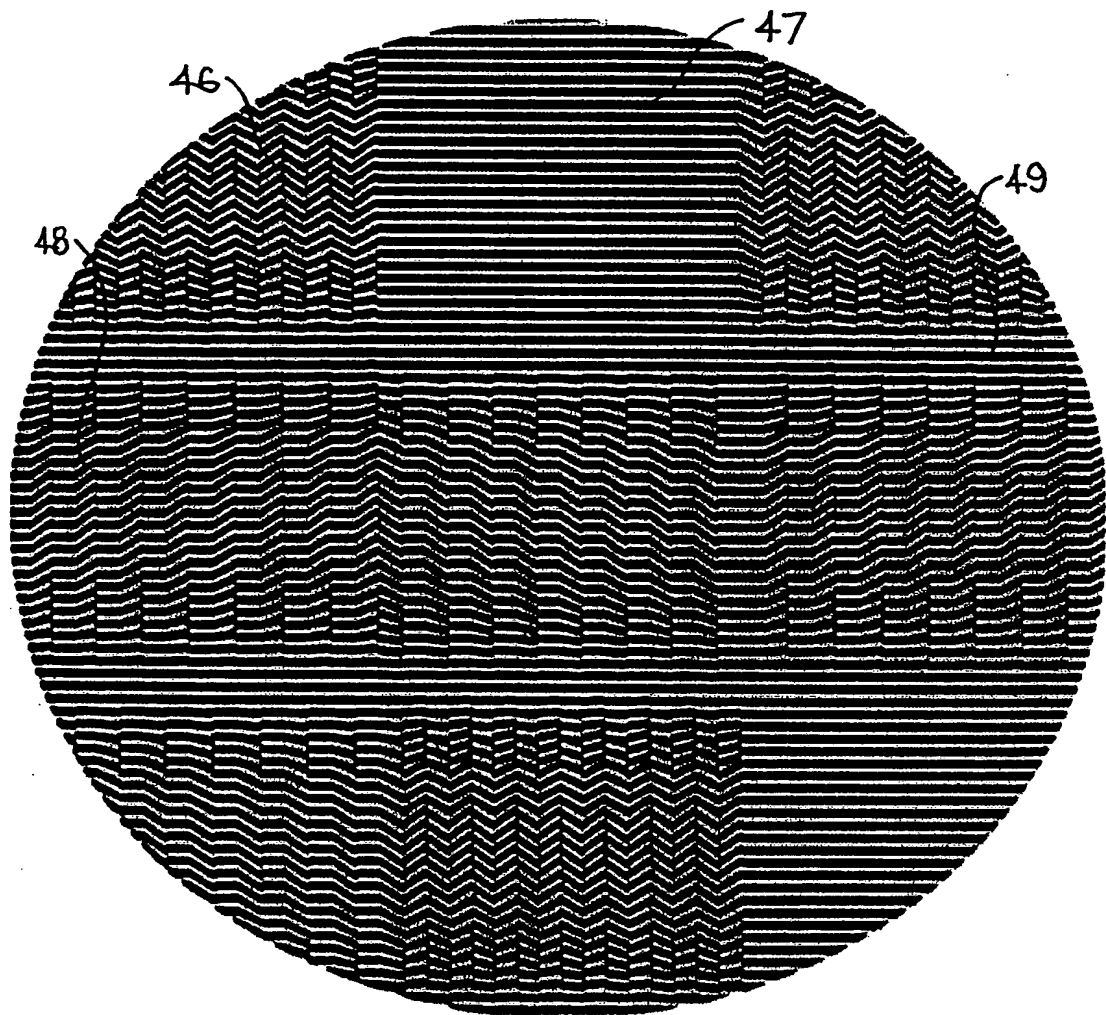


FIG 13

9/10


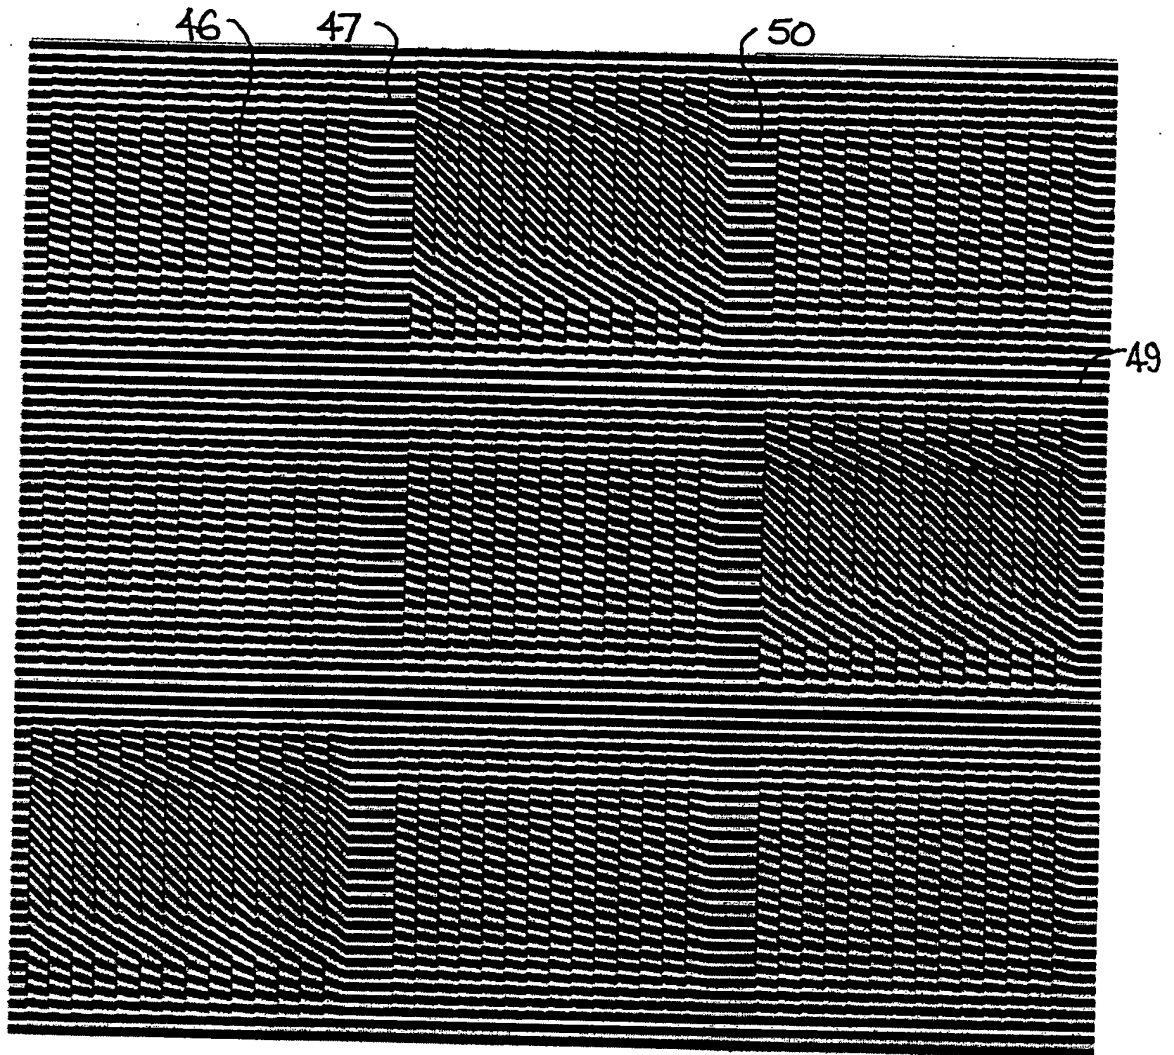


FIG 14

10/10

FIG 15

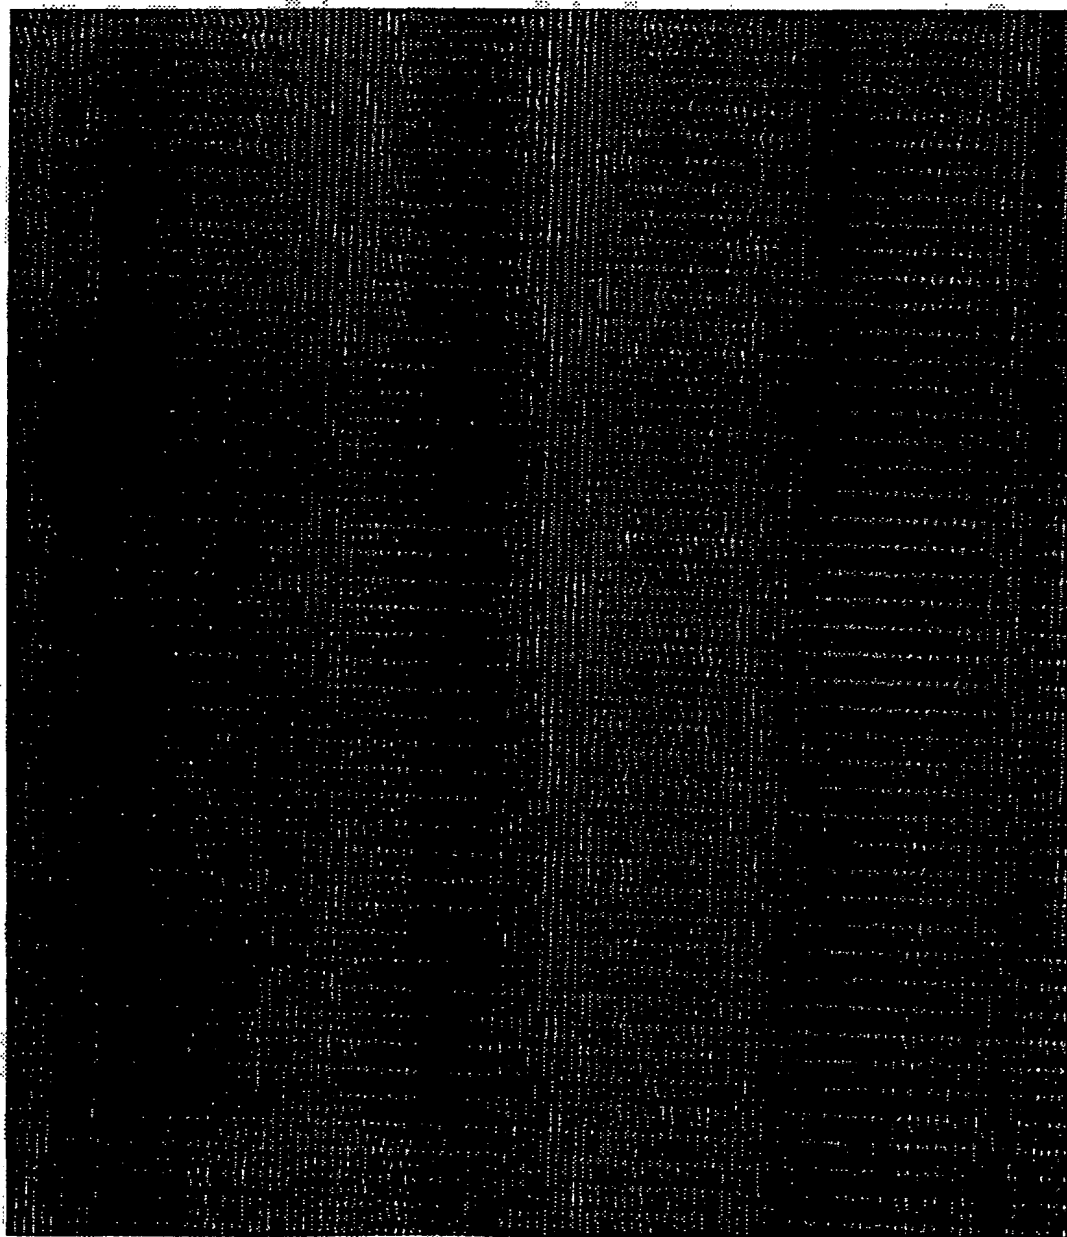

INTERNATIONAL SEARCH REPORT

International application No.
PCT/AU 99/00520

A. CLASSIFICATION OF SUBJECT MATTER																						
Int Cl ⁶ : G02B 5/18, 27/44, B44F 1/12, B42D 15/10, 209/00																						
According to International Patent Classification (IPC) or to both national classification and IPC																						
B. FIELDS SEARCHED																						
Minimum documentation searched (classification system followed by classification symbols) IPC G02B 5/18, 27/44, B44F 1/12, B42D 15/10, 209/00																						
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched AU: IPC as above																						
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) WPAT																						
C. DOCUMENTS CONSIDERED TO BE RELEVANT																						
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.																				
A	WO 95/04948 A (CSIRO) 16 February 1995 Pages 9 - 11	1																				
A	WO 96/11114 A (LEONHARD KURZ GMBH) 18 April 1996 Pages 3 - 6	1																				
<input type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex																						
<p>* Special categories of cited documents:</p> <table border="0"> <tr> <td>"A"</td> <td>document defining the general state of the art which is not considered to be of particular relevance</td> <td>"T"</td> <td>later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>"E"</td> <td>earlier application or patent but published on or after the international filing date</td> <td>"X"</td> <td>document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>"L"</td> <td>document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>"Y"</td> <td>document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>"O"</td> <td>document referring to an oral disclosure, use, exhibition or other means</td> <td>"&"</td> <td>document member of the same patent family</td> </tr> <tr> <td>"P"</td> <td>document published prior to the international filing date but later than the priority date claimed</td> <td></td> <td></td> </tr> </table>			"A"	document defining the general state of the art which is not considered to be of particular relevance	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	"E"	earlier application or patent but published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	"O"	document referring to an oral disclosure, use, exhibition or other means	"&"	document member of the same patent family	"P"	document published prior to the international filing date but later than the priority date claimed		
"A"	document defining the general state of the art which is not considered to be of particular relevance	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention																			
"E"	earlier application or patent but published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone																			
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art																			
"O"	document referring to an oral disclosure, use, exhibition or other means	"&"	document member of the same patent family																			
"P"	document published prior to the international filing date but later than the priority date claimed																					
Date of the actual completion of the international search 30 July 1999		Date of mailing of the international search report -6 AUG 1999																				
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200 WODEN ACT 2606 AUSTRALIA Facsimile No.: (02) 6285 3929		Authorized officer PHILIP SPANN Telephone No.: (02) 6283 2178																				

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.
PCT/AU 99/00520

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report				Patent Family Member			
WO	95/04948	AU	73421/94	CA	2168772	EP	712500
		US	5825547	JP	09-502277		
WO	96/11114	AT	173983	AU	33791/95	BR	9509311
		CA	2202068	CN	1160376	DE	4436192
		EP	785874	ES	2125653	JP	10-506857
END OF ANNEX							

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

